

COBRA® BITUDECK & PROTAPE Extends the life of the structure




Features

- Extends the life of wooden joists
- Waterproof
- Absorbs sound resonance
- Matte black to avoid light reflections between the boards
- Resists tearing, warping and temperature variations
- Easy and convenient to use

Designation	Code FR	Code NL	EAN code	Qty /package	Qty/pallet	Weight (kg)
BITUDECK	0145	2306	3760178990196	8	240	1,55
PROTAPE	1329	-	3760178994644	24	-	0,31

Features	Bitudeck	Protape
Nominal thickness	1.5 mm	1 mm
Width	75 mm	80 mm
Length	10 m	20 m
Top side	Self-adhesive elastomeric bitumen	Reinforced PER foam
Bottom side	HDPE film	acrylic
Tensile strength	150 N	720 kPa
Nail tear resistance	25 N	-
Operating temperature	-20°C à +70°C	De -40°C à +90°C
Storage temperature	+15°C	Frost-free
Waterproofing	0.3 mpa, 120 min	-
Sticking power	1.5	35 N/25 mm

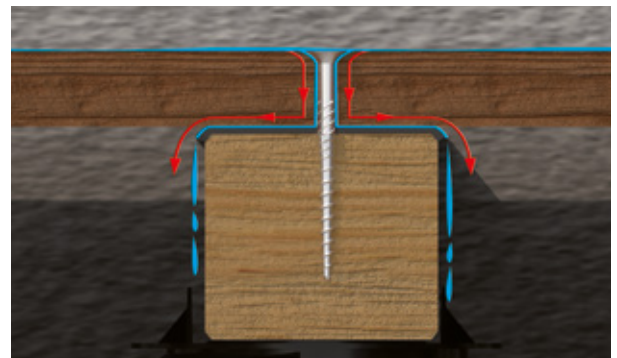

Water circulation

