


“Boat deck” joint

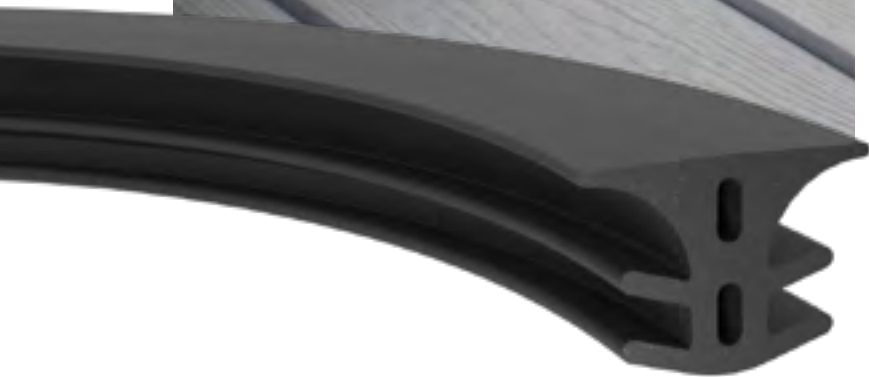

Description

Elastomeric joint, allows a watertight seal between deck boards spaced 4 to 6 mm apart.

Composition

Thermoplastic elastomer rubber of density 1.18 TPS- type S.E.B.S. This high quality material has an excellent resistance to atmospheric agents, aging, U.V. It is 100% recyclable. Used in the automotive industry. Resists temperature variations between -50°C and +90°C.

Installation

Unroll the joint and press it by a simple thumb pressure on the elastomer cord. Thin edges hold the joint in the gap between the deck boards.

Use

Cobra SEAL is particularly suitable for covered terraces, café terraces, restaurants, bathrooms, covered swimming pool decks, covered balconies, etc. Prevents the fall of debris between the boards. Boat deck appearance. Be careful to maintain good ventilation of the terrace underneath.



Code FR	Code NL	EAN Code	Qty/package	Qty/pallet	Weight (kg)
1124	2307	3700421811243	5	60	2,90

