



NIVO® pedestals



NIVO® TILES

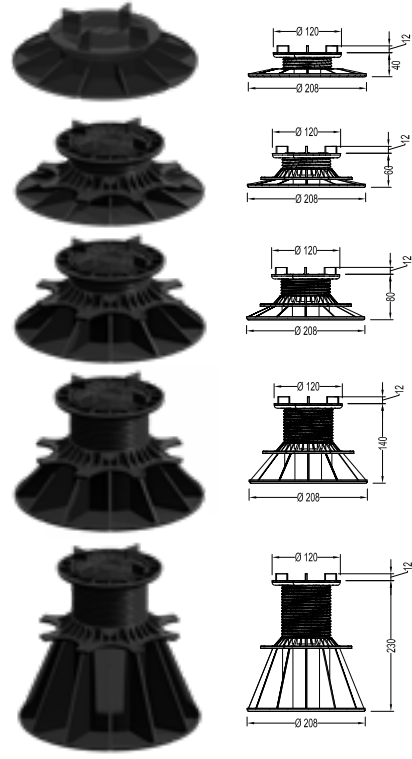

Features

- Top head with tile support
- Height adjustment by micrometric jack
- Supports up to 250 kg (in high position) and up to 1 ton (in low position), compression load on 1/4 of the head of the pedestal
- Complies with decking installation standards
- Resistant to UV, atmospheric agents and temperatures between -30°C and +60°C
- Made from a recycled material and 100% recyclable
- Allows air circulation under the deck, as well as the passage of cables and ducts.
- Compatible with the STRUCTURAL concept

Designation	Code FR	Code NL	EAN Code	Qty/package	Qty/pallet	Weight (kg)
H 25 - 40 mm	0337	2051	3760178992046	60	840	0,17
H 40 - 60 mm	0273	2052	3700421802739	60	840	0,23
H 50 - 80 mm	0274	1043	3760178990127	60	600	0,26
H 80 - 140 mm	0275	1044	3760178990134	60	480	0,33
H 140 - 230 mm	0276	1045	3760178990141	40	280	0,51

Designation	Code FR	Code NL	EAN Code	Qty/package	Qty/pallet	Weight (kg)
Extension stud 60 mm	0206	1046	3760178991612	60	1080	0,10
Slope corrector 2-5%	0338	1775	3760178992077	60	1560	0,20
Shock absorbing pad Thickness 5 mm	0898	2386	3700421808984	42	672	0,03

