

# FASTENERS

## Wood deck screws / wood joists



### Features


- Stainless steel screws AISI304
- Sharp thread for better penetration in wood
- Sharp point to reduce wood splitting
- Spiral top to facilitate the penetration of the screw in the wood
- Deep Torx recess to prevent bit rejection and slippage

### Logistics

Designation	Code FR	Code NL	EAN Code	Qty/package	Qty/pallet	Weight (kg)
5x50 mm (200 pcs)	0601		3760180240470	12	288	0,90
5x50 mm (500 pcs) + 4 spacers + 1 drill bit	0799		3760180247448	6	144	2,25
5x60 mm (500 pcs) + 4 spacers + 1 drill bit	0966		3700421809660	6	144	2,80
5x60 mm (200 pcs)	0602		3760180240852	6	288	0,98
6x70 mm (100 pcs)	0613		3700421806133	6	288	0,95

### Dimensions (mm)

Designation	Size	A (mm)	L (mm)	U (mm)	D (mm)	dr (mm)	Torx
0601 - 0799	M5x50	8	50	4	5	4	T25
0602 - 0966	M5x60	8	60	8	5	4	T25
0613	M6x70	10	70	10	6	5	T30

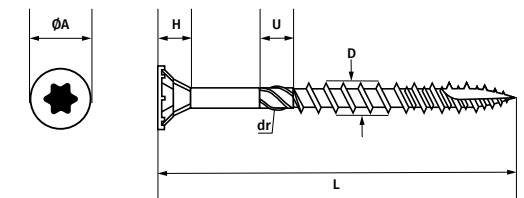

### Decking\*

Designation	Board thickness (mm)**	Density of the wood (kg/m³)	
		<600	>=600
0601 - 0799	21-23	Vis M5x50	Vis M5x60
0602 - 0966	24-27	Vis M5x60	Vis M6x70
0613	28	Vis M6x70	Vis M6x70

### Structure

Exotic woods**	Softwood	Aluminium	Steel
✓	✓	-	-

\* According to decking standards requirements  
 \*\* Pre-drilling is strongly recommended in hardwoods